



LOGIC


# OPTIX SERIES



Cableless  
Connectivity



High  
Refresh Rate



Long  
Lifespan





Thin and  
Ultra-light Cabinet




Easy  
Installation




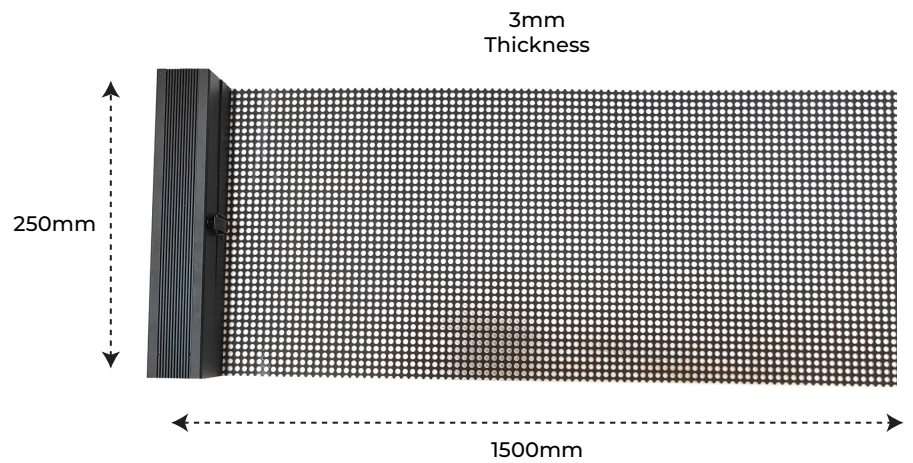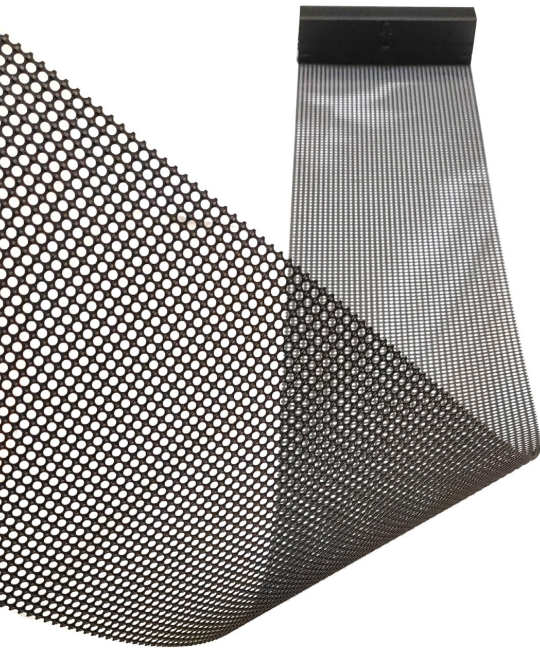

Easy to install or maintain from rear or front of window glass,  
which is flexible for different installation places

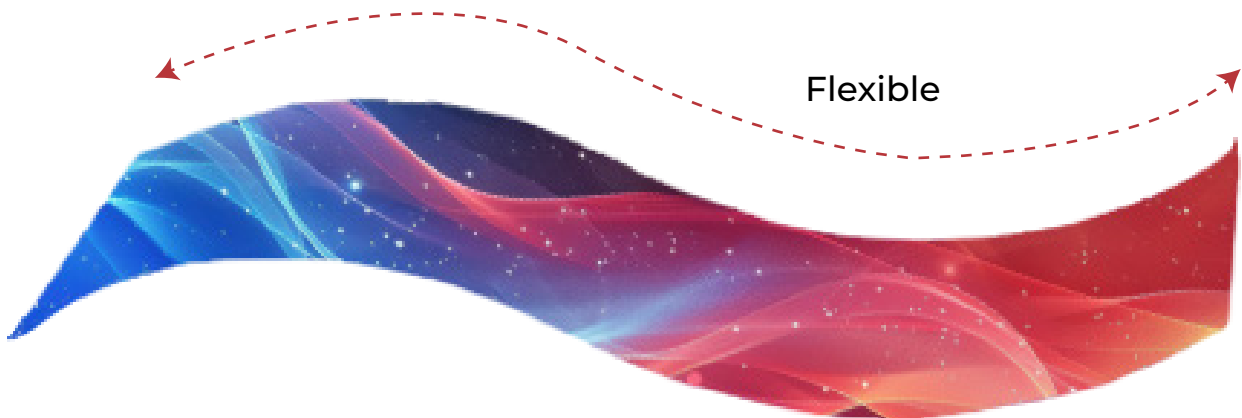

Various installation methods, floor stand, paste on & hanging  
from ceiling applications

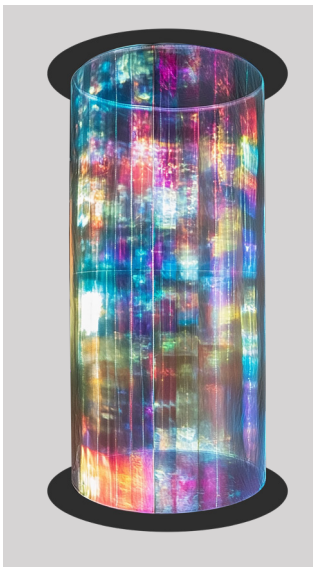





## SPECIFICATION

MODEL NAME	OptiX-3.9	OptiX-6	OptiX-10	OptiX-15
Application	indoor	indoor	indoor	indoor
Pixel Pitch (in mm)	3.91mm	6.25mm	10mm	15.6mm
LED Type	SMD	SMD	SMD	SMD
LED Lifetime (In Hours)	100000	100000	100000	100000
Brightness (cd/m2)	3500-5000	3500-5000	3500-5000	3500-5000
Contrast Ratio	5000:1	5000:1	5000:1	5000:1
Frame Rate (Hz/sec)	60	60	60	60
Refresh Rate (Hz/sec)	3840	3840	3840	3840
Panel Dimension W x H x D (in mm)	1000x250x3	1000x250x3	1000x250x3	1000x250x3
Physical Resolution	256x64	16x40	100x25	64x16
weight (Kg/Cabinet)	2.5	2.5	2.5	2.5
Service Access	Rear	Rear	Rear	Rear
Optimal Viewing Angle (H/V)	140 /160	140 /160	140 /160	140 /160
Storage Temperature	-20~+50	-20~+50	-20~+50	-20~+50
Working Temperature	-20~+60	-20~+60	-20~+60	-20~+60
Voltage	AC : 100~240V 50/60Hz	AC : 100~240V 50/60Hz	AC : 100~240V 50/60Hz	AC : 100~240V 50/60Hz
Power Consumption (Avg) (in W/m2)	240	240	240	240
Power Consumption (Max) (in W/m2)	800	800	800	800
Protection Level	IP43	IP43	IP43	IP43
Grey Scale	14bit	14bit	14bit	14bit
Physical density	65536	25600	10000	4096

# LOGIC

EMPOWERING DIGITAL TRANSFORMATION



Toll Free (India) : 1800 2020 990  
For Services & Support : [servicesupport@logicav.in](mailto:servicesupport@logicav.in)  
For Sales Enquiries : [sales@logicav.in](mailto:sales@logicav.in)  
Website : [www.logicav.in](http://www.logicav.in)

