


INSTALLATION MANUAL

PUSH PULL WALL MOUNT

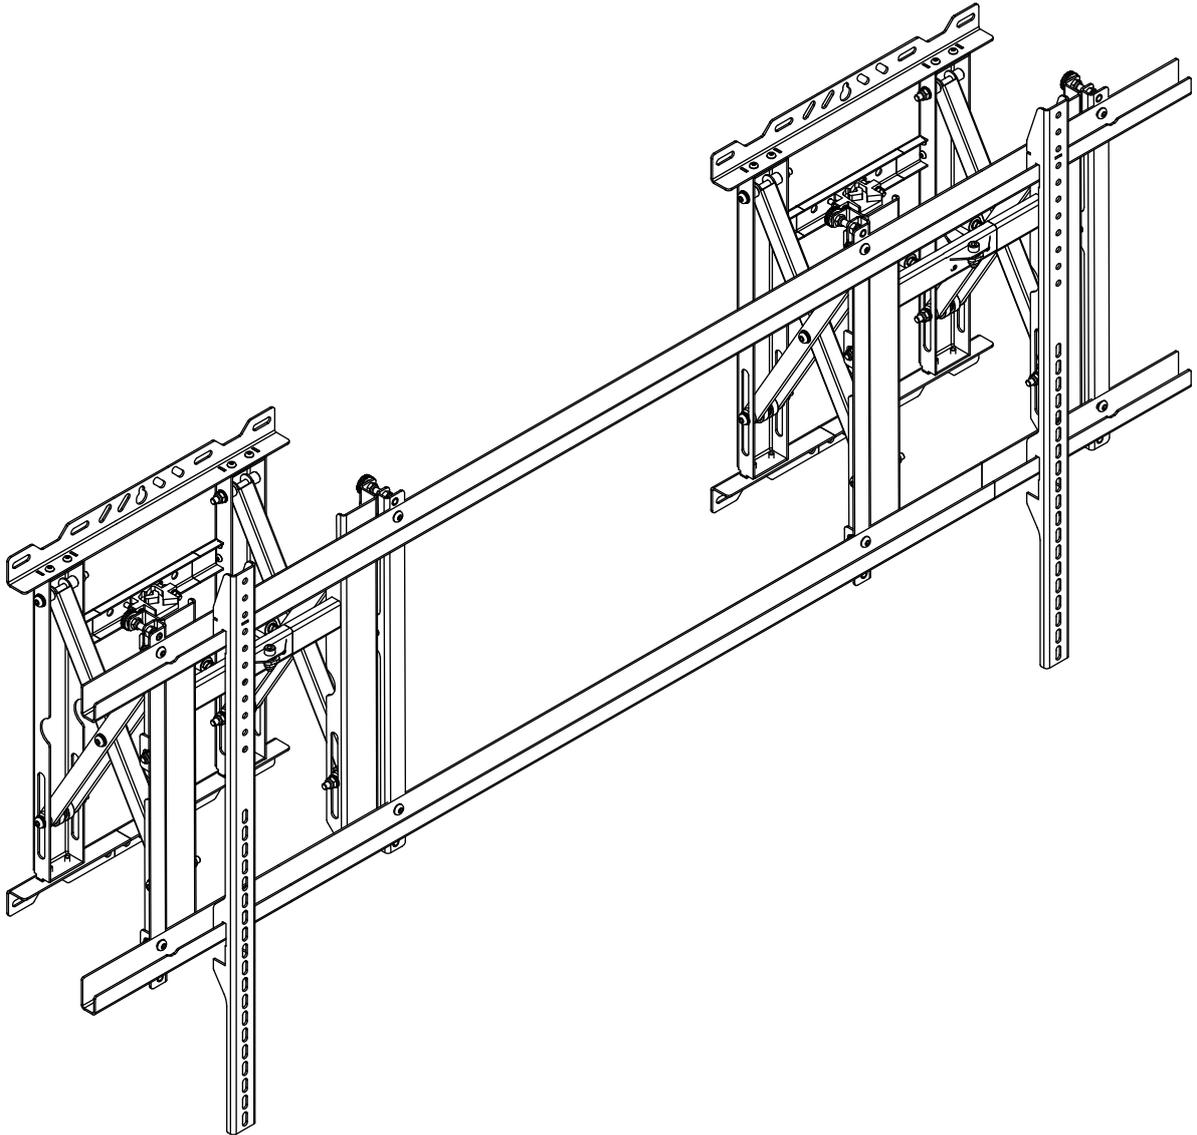


MODEL	SERIES	VESA	DISPLAY SIZE	MAX LOAD
LGC-98110	PUSH PULL WALL MOUNT	400x400 to 1600x800	98" to 110"	265 lbs (130 kg)


Checklist




Interface bracket x 2



LH




RH



Join Part x 2




Connecting Bar x 4

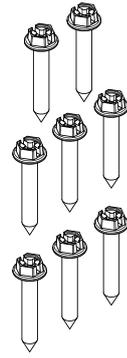

W-A: Concrete Screw x 8



W-B: Fischer expansion plug x 8



W-C: Washer x 8



M-A: M8 X 25 x 4



M-B: plastic washer x 4



M-C: Metal washer x 4



M-D: M6 X 25 x 4



M-E: Plastic x 4 metal x 4 washer



M-F: M5 X 25 x 4





M-G: Plastic x 4 metal x 4 washer




M-H: Allen key x 1

IMPORTANT : Prior to installation, ensure that you have received all the parts as per the checklist

1. Product Dimension

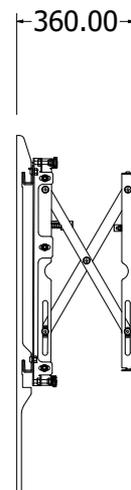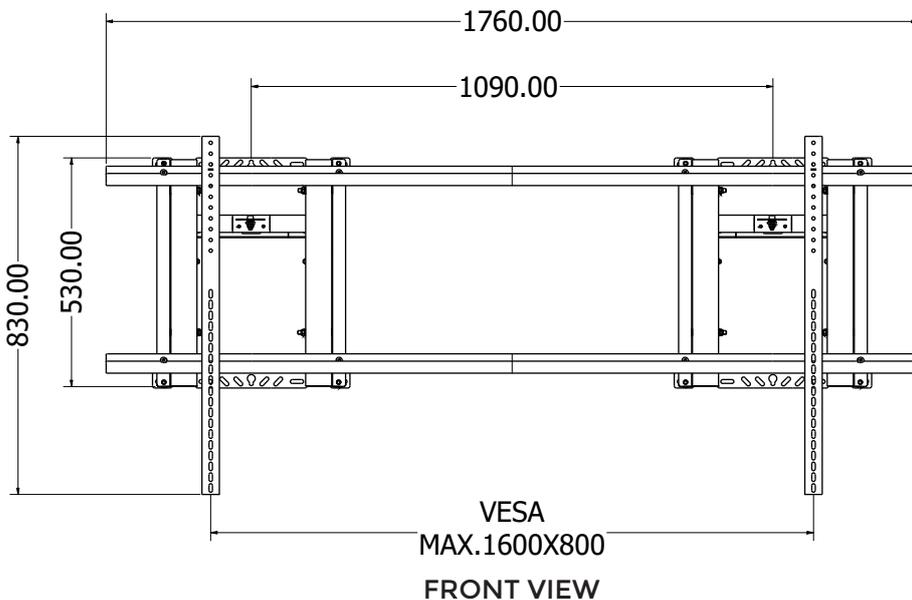

SIDE VIEW OPEN

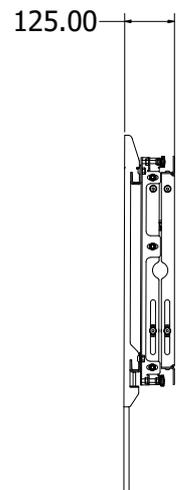

SIDE VIEW CLOSED


Dimension in mm

2. Fixing the connecting Bar

Choose below method for fixing wall mount.


ATTENTION: Drilling the wall for the wall mount should be executed by a craftsman only
Exercise care to prevent any scar or damage to the wall.

CAUTION : Wear safety glasses while operating power equipment.
Failure to comply may result in eye injury.

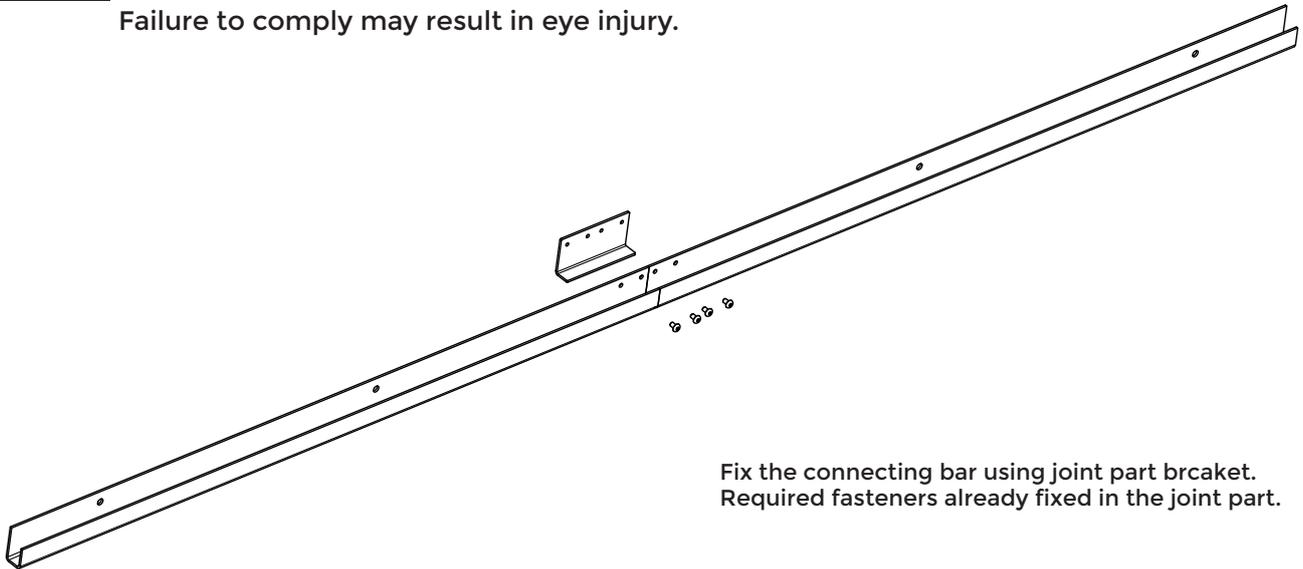


Fix the connecting bar using joint part bracket.
Required fasteners already fixed in the joint part.

3. Fixing the connecting bar to the bracket

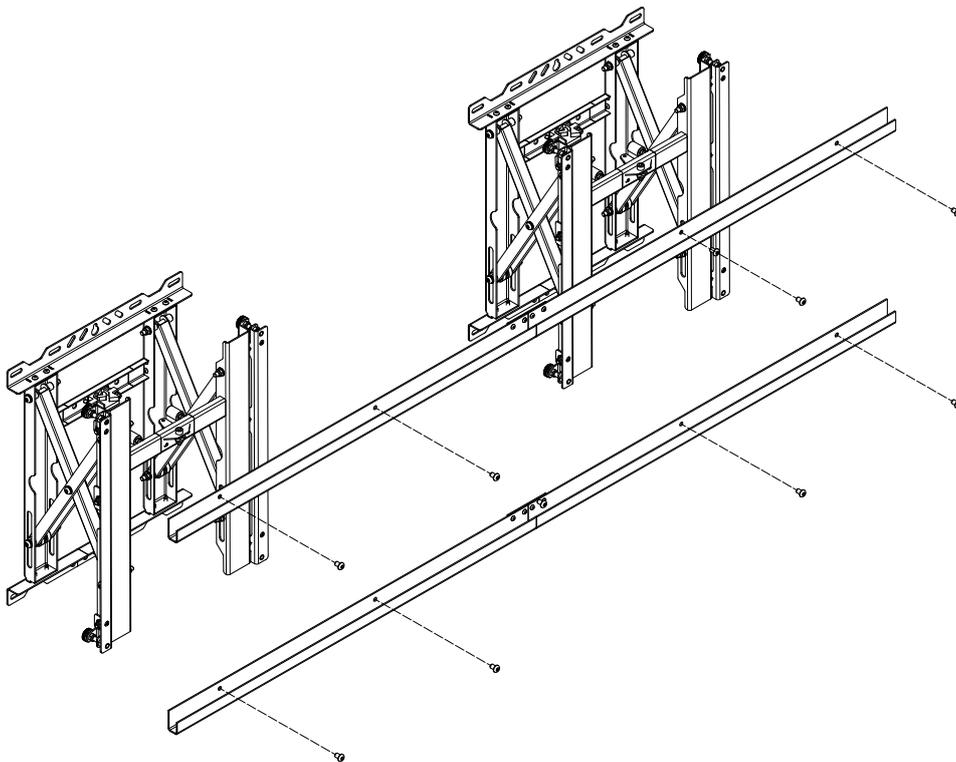


Fix the whole connecting bar to the wall mount bracket as show in image.
Fasteners for fixing the bar is given in wall mount at connecting point


4. Installation

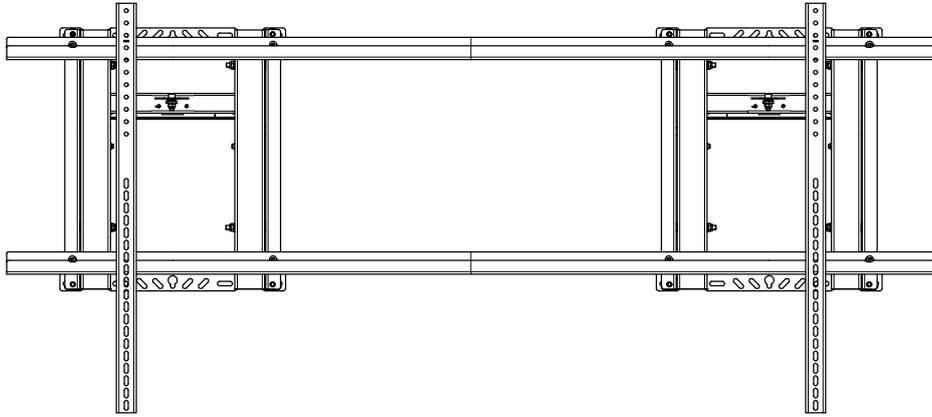


1. Place the mount on the wall

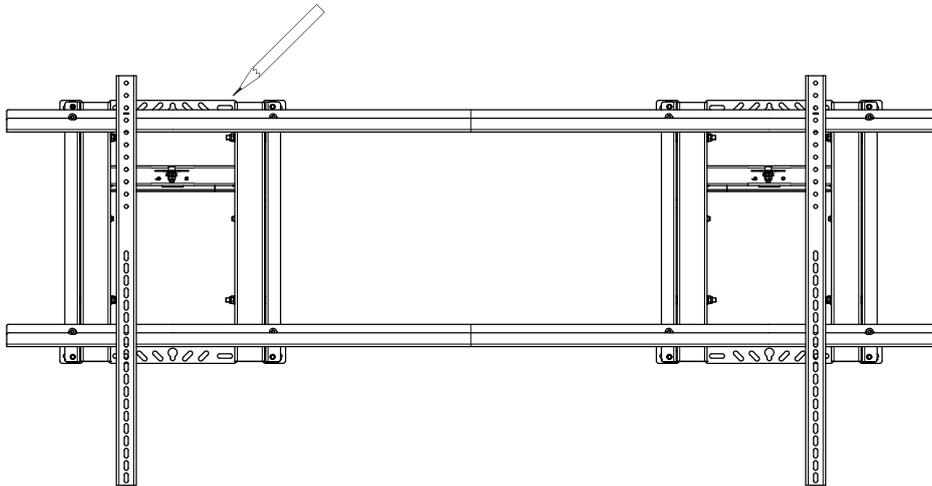


2. Place the unit on the wall and make marks on the wall.
Note: While marking make sure the mount is placed in a straight line using the surface leveler

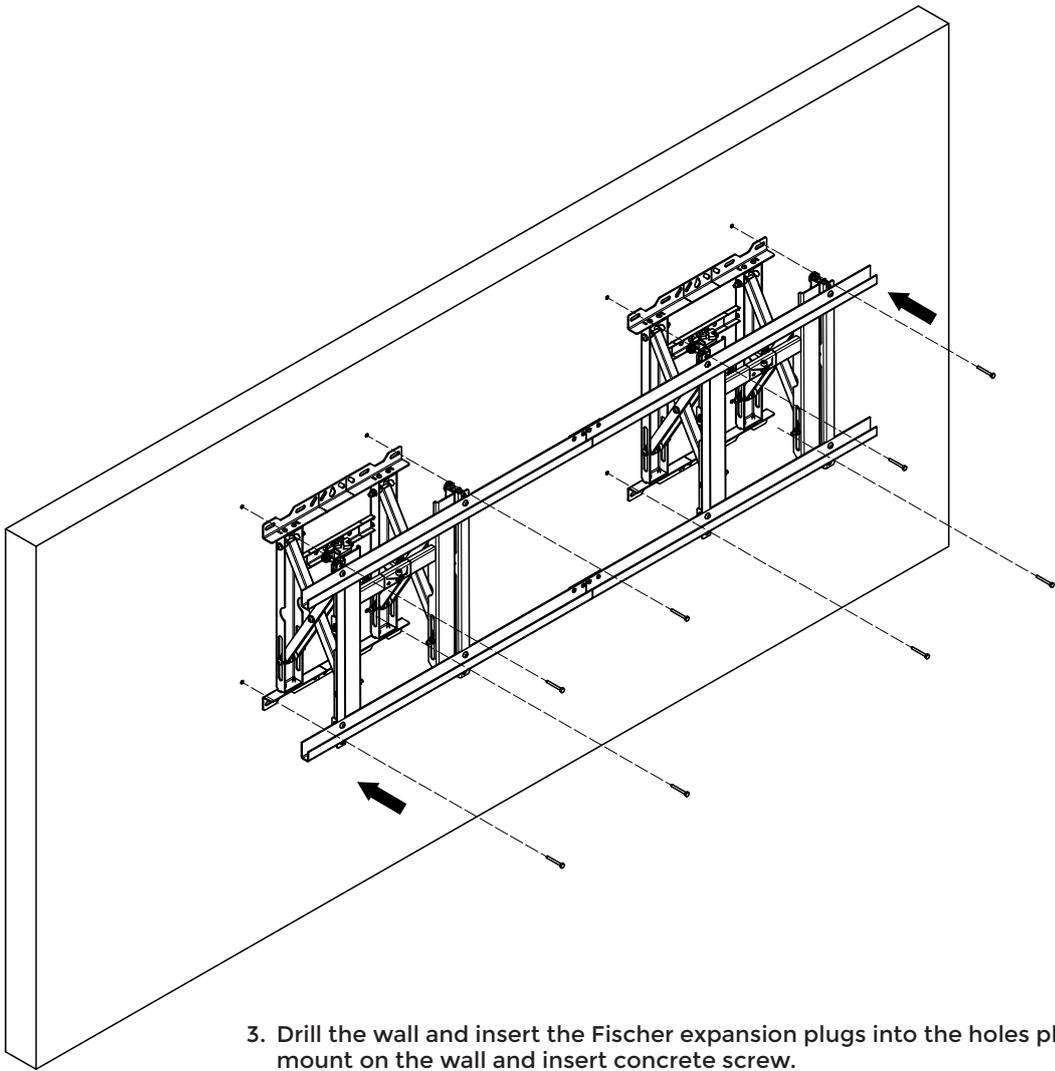

3. Drill the wall and insert the Fischer expansion plugs into the holes place the mount on the wall and insert concrete screw.
(Refer W-A, W-B, W-C in the checklist)

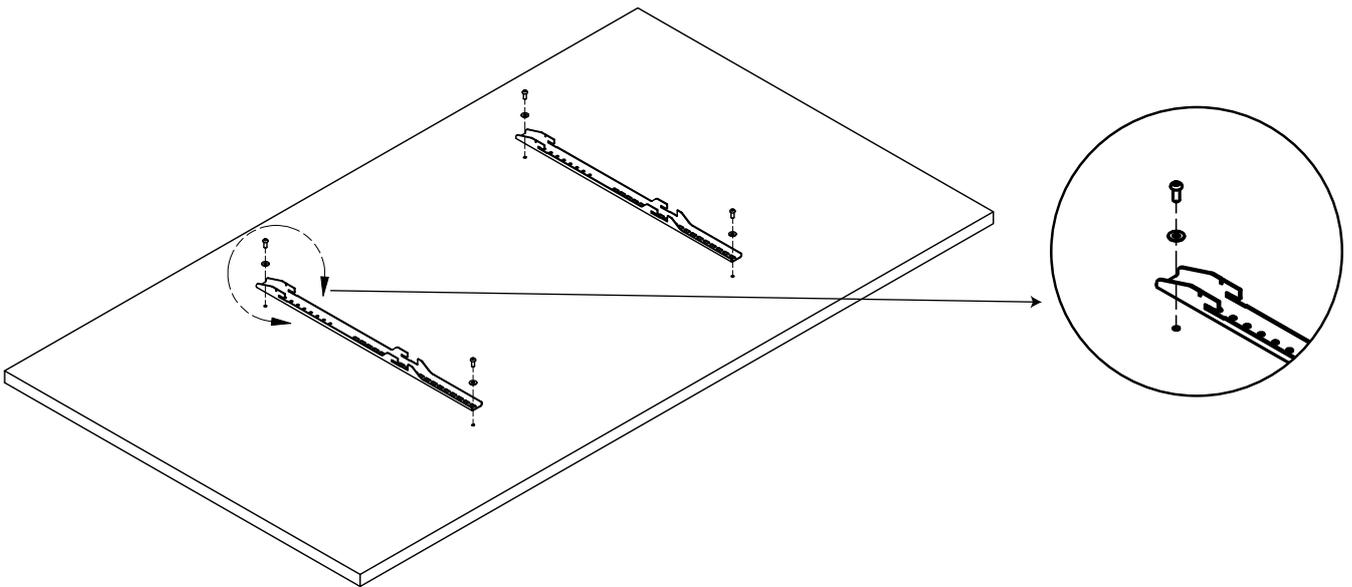


4. Place the interface bracket on the TV/ display and insert the washer and screw.
(Refer the checklist for the suitable screw and washer)

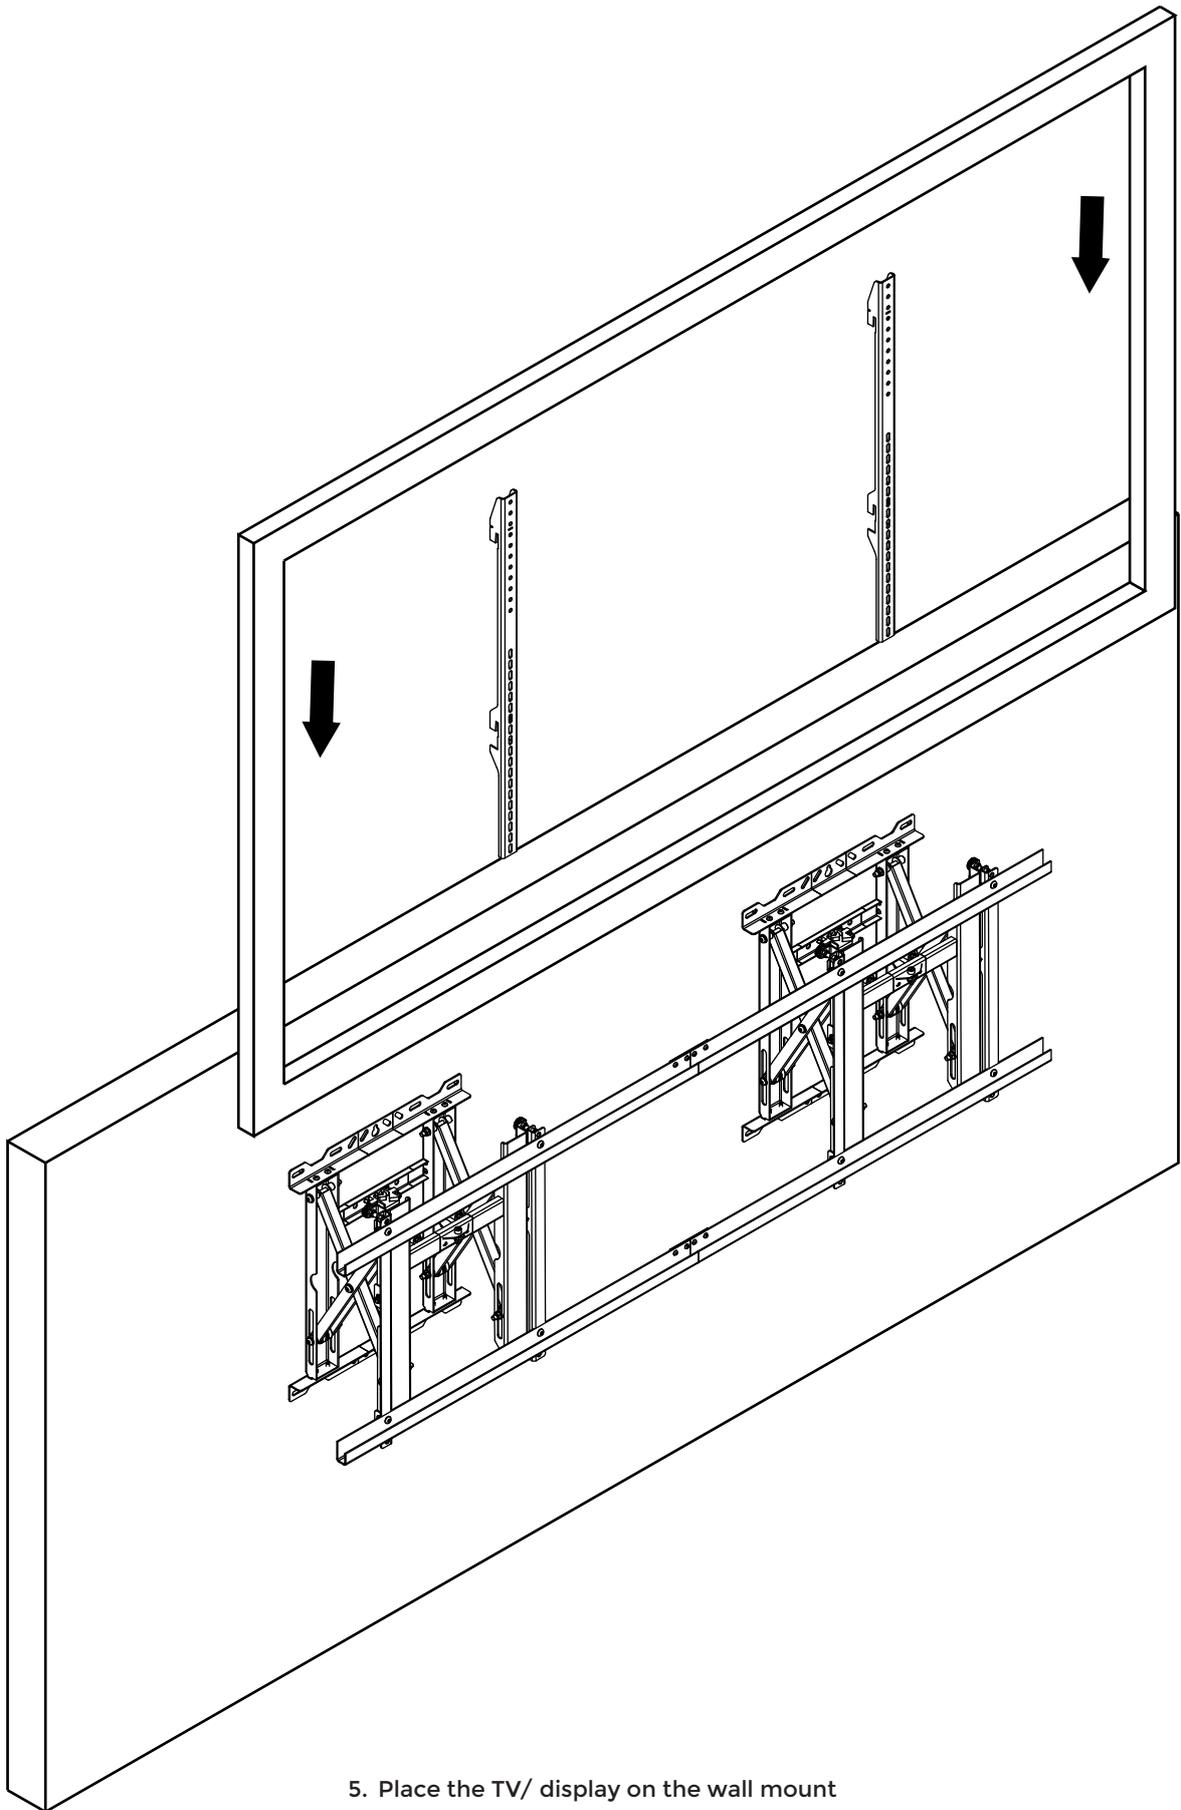


5. Place the TV/ display on the wall mount

Instruction for locking and unlocking of the display.

- After hanging the display to the bracket to lock the display first push the right side of the display and lock the mount. In say way do at left side.
- For unlocking of the display from the bracket first push at right side of the display and unlock it first and then unlock the left side.

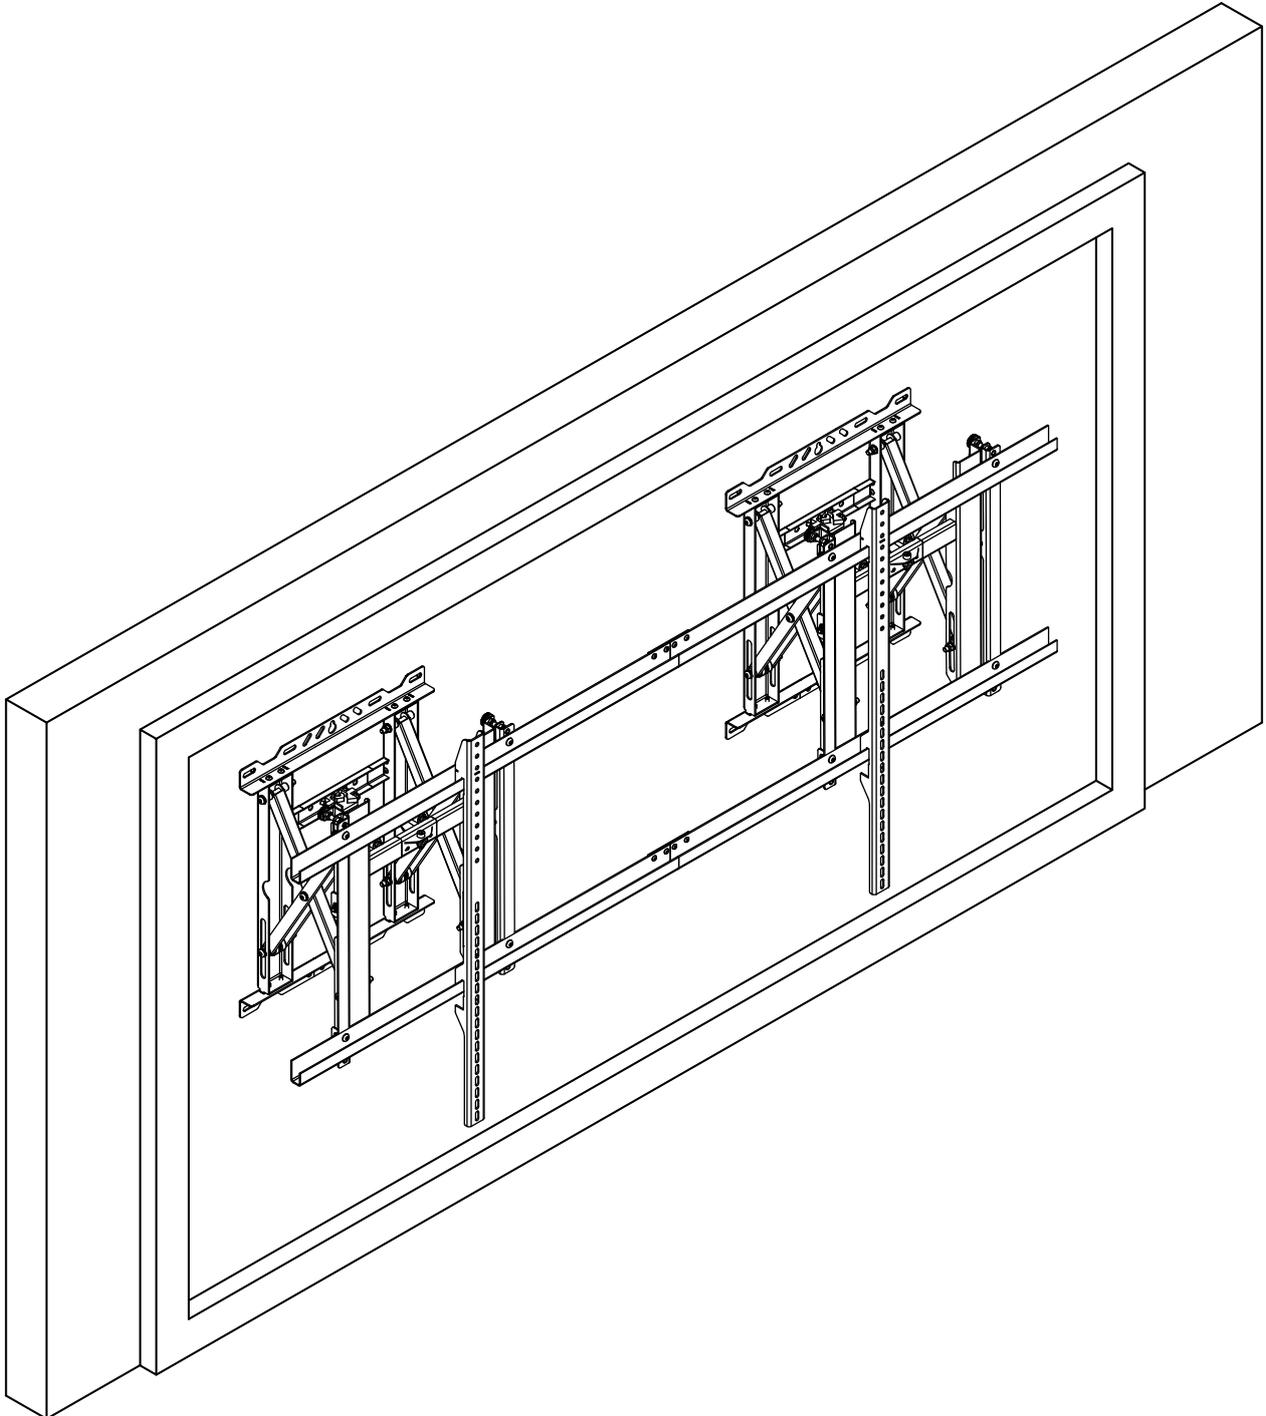

NOTE - Display cannot be unlocked at one push in middle. Since the display size is large.

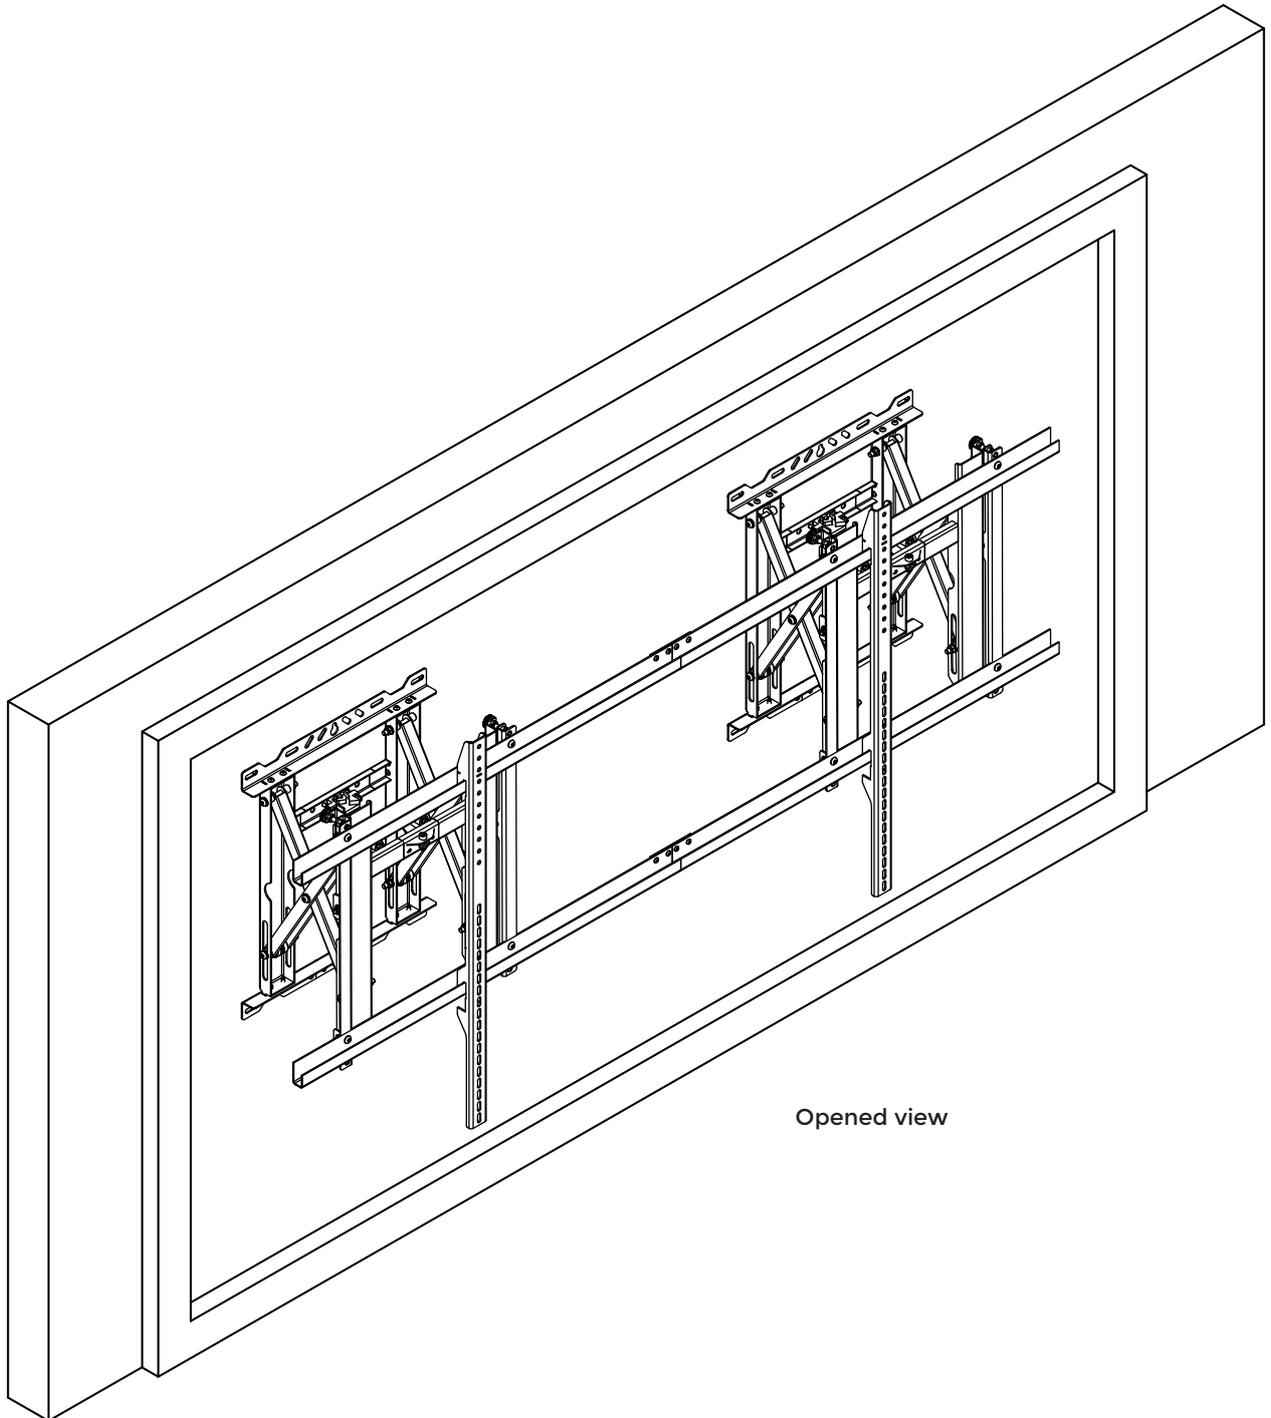

Opened view

Final view after installing the mounted display on the wall