



4. Place the TV/ display on the wall mount

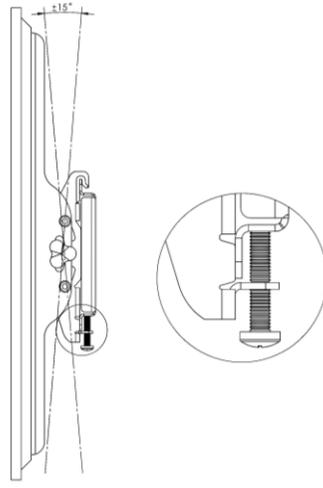

5. Adjust the angle and lock the mount

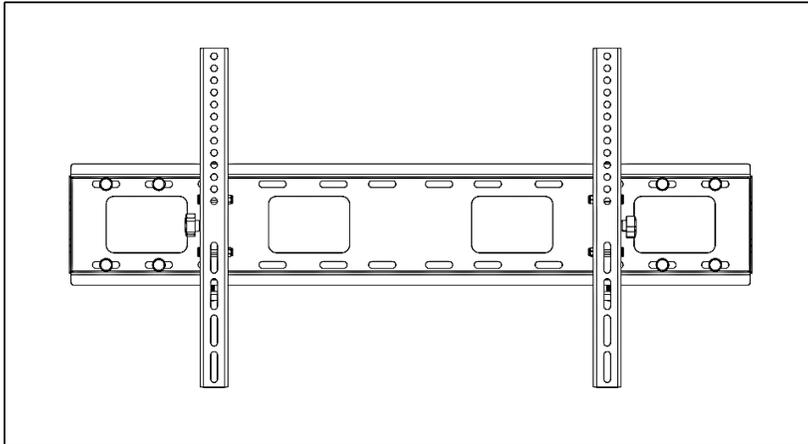


View after installing the mount on the wall

www.logicav.in

LOGIC

INSTALLATION MANUAL

**FIXED WALL MOUNT (TILT)
LGWM 3790T**

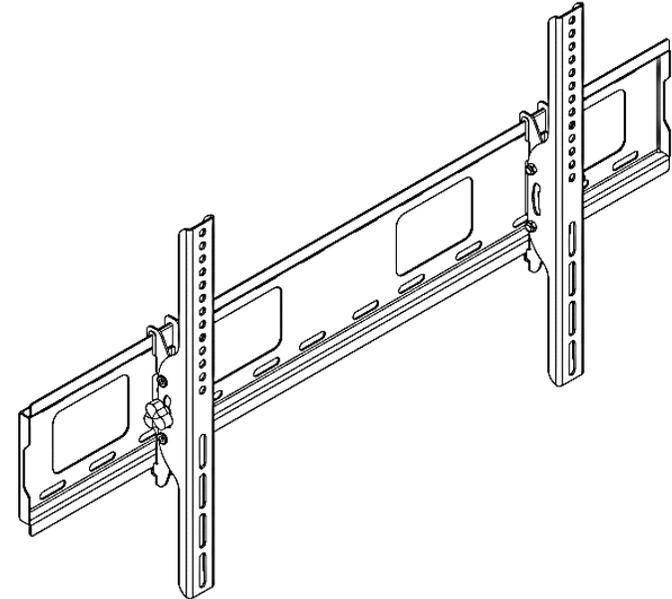


MODEL	SERIES	VESA	DISPLAY SIZE	MAX LOAD
LGWM-3790T	FIXED WALL MOUNT	55X58 to 800X400	37" to 90"	165 lbs (75Kg)

www.logicav.in

Checklist

Wall Mount x 1



Interface bracket x 2

M-B

QTY 4



Washer

M-C

QTY 4



M6 X 20

M-D

QTY 4



M6 X 50

M-E

QTY 4



M8 X 25

M-F

QTY 4



M4 X 20

M-G

QTY 4



M5 X 40

M-A

QTY 6



Concrete
Screw

QTY 6



Fischer
expansion plug

QTY 10




Washer

Important:


Prior to installation, ensure that you have received all the parts as per the checklist

1. Product Dimension

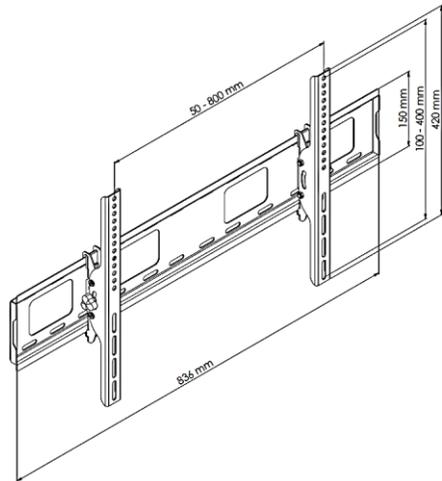


Depth from wall
to display

65 mm



Tilting angle

±15°



www.logicav.in

Dimension in mm

2. Installation


Instructions for fixing wall mount:

Attention:

Drilling the wall for the wall mount should be executed by a craftsperson only. Exercise care to prevent any scar or damage to the wall.


Caution:

Wear safety glasses while operating power equipment. Failure to comply may result in eye injury

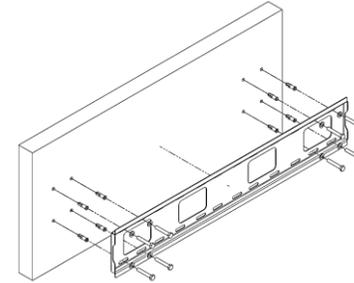

1. Place the wall unit on the wall and make marks on the wall.

Note: While marking make sure the mount is placed in a straight line using the surface leveler. Drill the wall and insert the concrete anchor in the holes & place the mount on the wall and insert concrete screws. (Refer A1, A2, A3, B1 in the checklist)

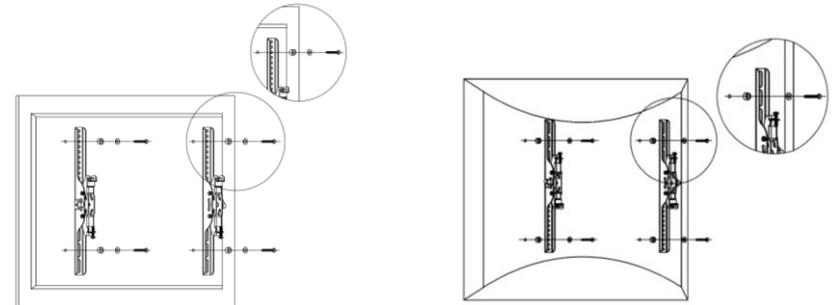

2. Place the interface bracket on the TV/ display and insert the washer and screw (Refer the checklist for the suitable screw and washer)

3. For a curved back or obstruction in display or TV kindly follow the above process

www.logicav.in