



INSTALLATION MANUAL

FLOOR MOUNT TROLLEY/AV CART

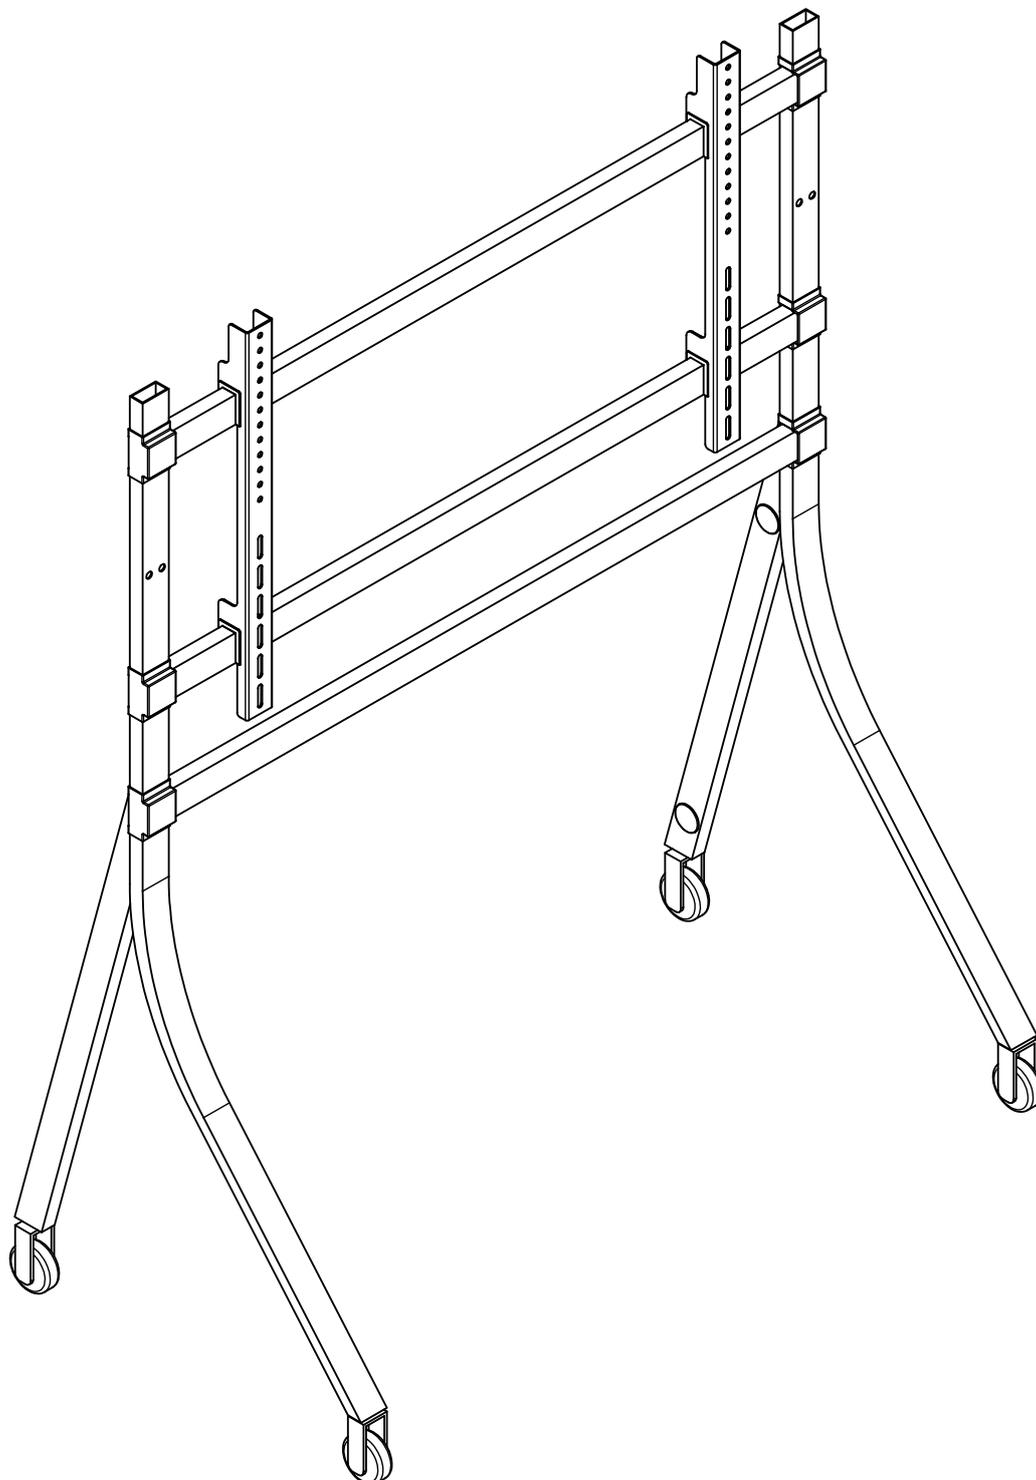


MODEL	SERIES	VESA	DISPLAY SIZE	MAX LOAD
LGFS-6598	FLOOR MOUNT TROLLEY/AV CART	400x400 to 900x600	65" to 98"	265 lbs (120 kg)

Checklist

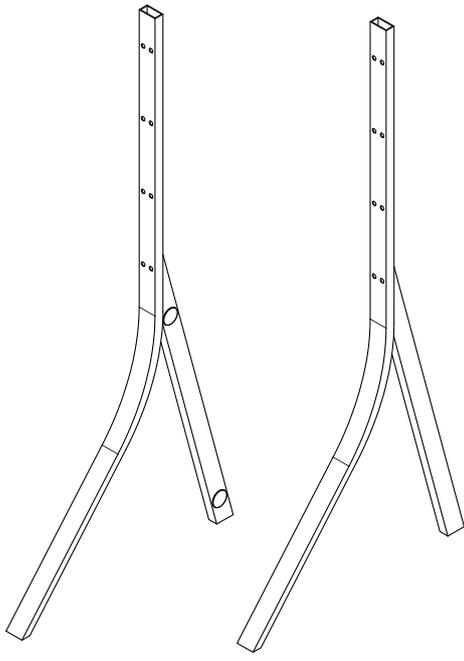


Right floor rail x 1


Left floor rail x 1

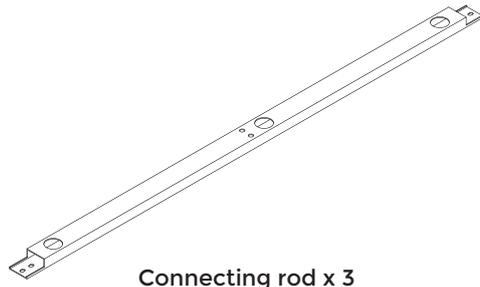


Connecting rod x 3



Interface bracket x 2




Castors x 4
(2 with lock,
2 without lock)



Screw Cap x 6



M-A: M8 x 15 x 12



M-B: M8
washer x 24
(Metal washer x 12,
plastic washer x 12)




M-C: M8 X 25 X 4



M-D: washer x 8
(Metal washer x 4,
plastic washer x 4)



M-E:
M6 X 25 X 4



M-F: washer x 8
(Metal washer x 4,
plastic washer x 4)



M-G:
M5 X 25 X 4




M-H: washer x 8
(Metal washer x 4,
plastic washer x 4)




M-H:
Allen key x 1

IMPORTANT : Prior to installation, ensure that you have received all the parts as per the checklist

1. Product Dimension

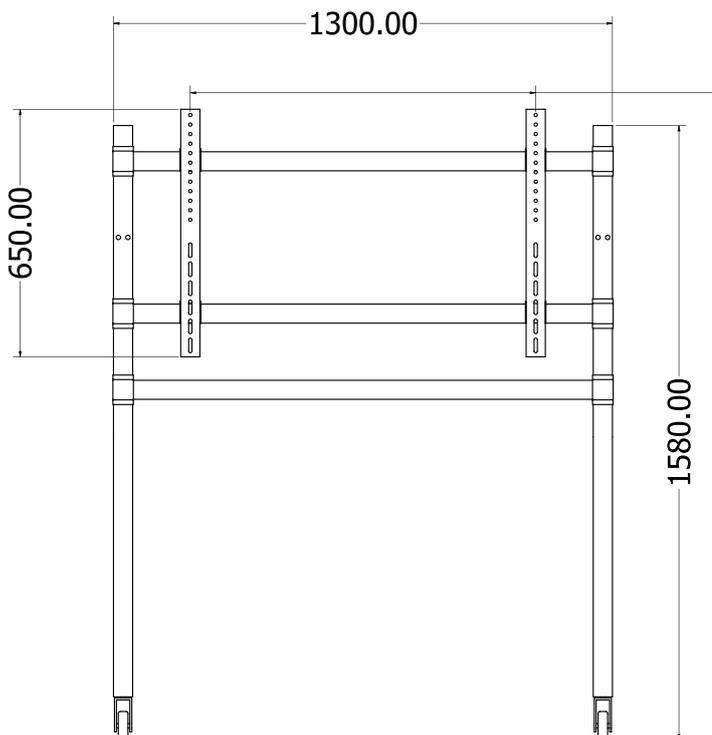


VESA
Min. 400 X 400
Max. 900 X 600

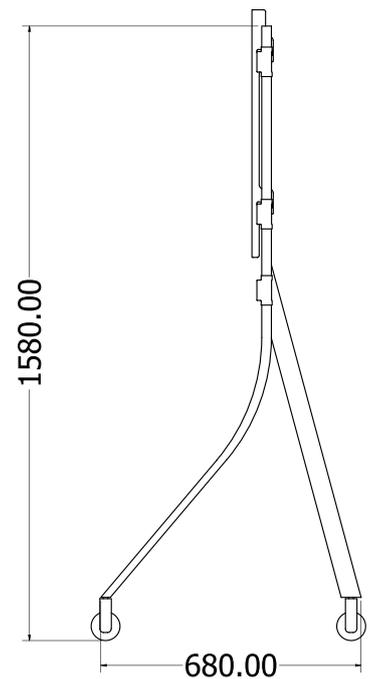



Dimension in mm

2. Installation


Instructions for fixing floor mount.

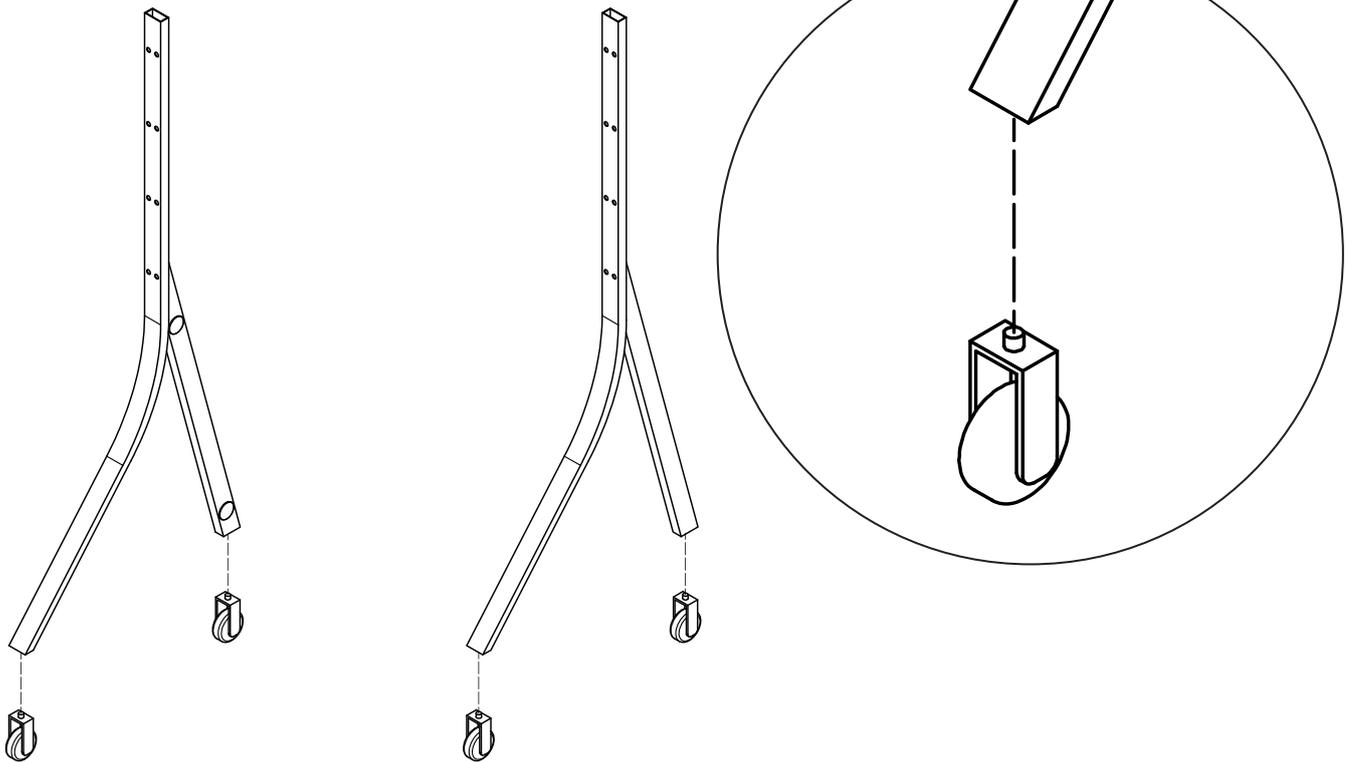


1. Place the castors to bottom side of the base left and right rail and tighten the castors

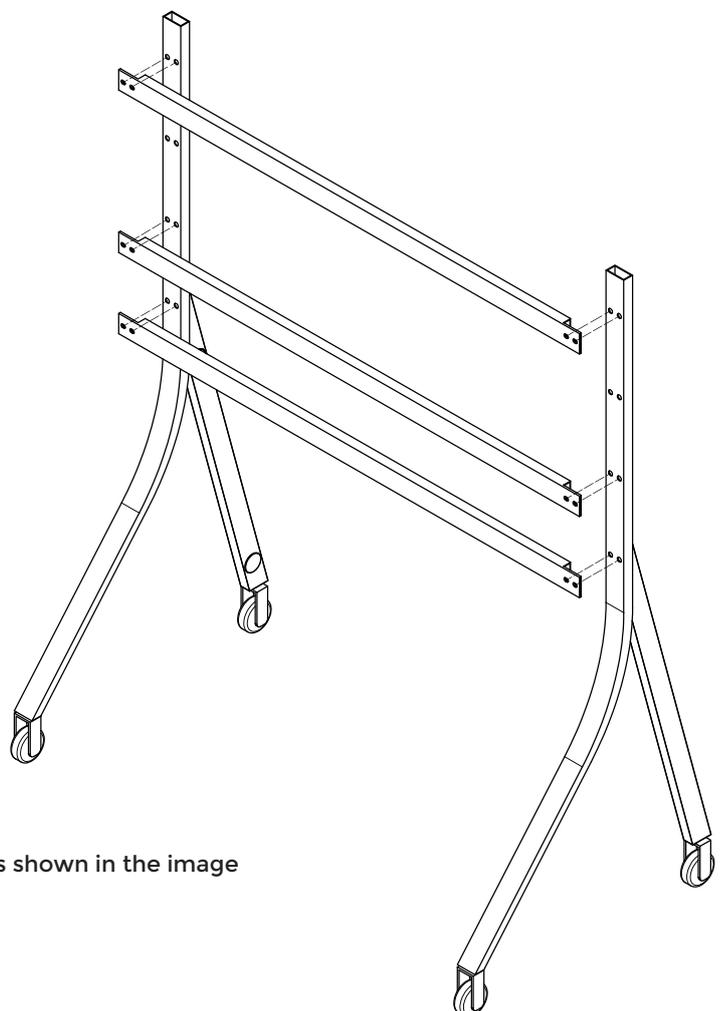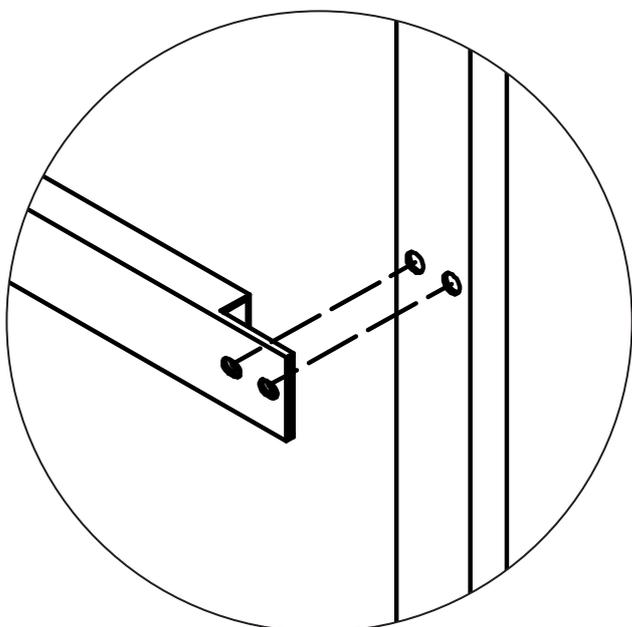



2. Place the connecting rod as shown in the image

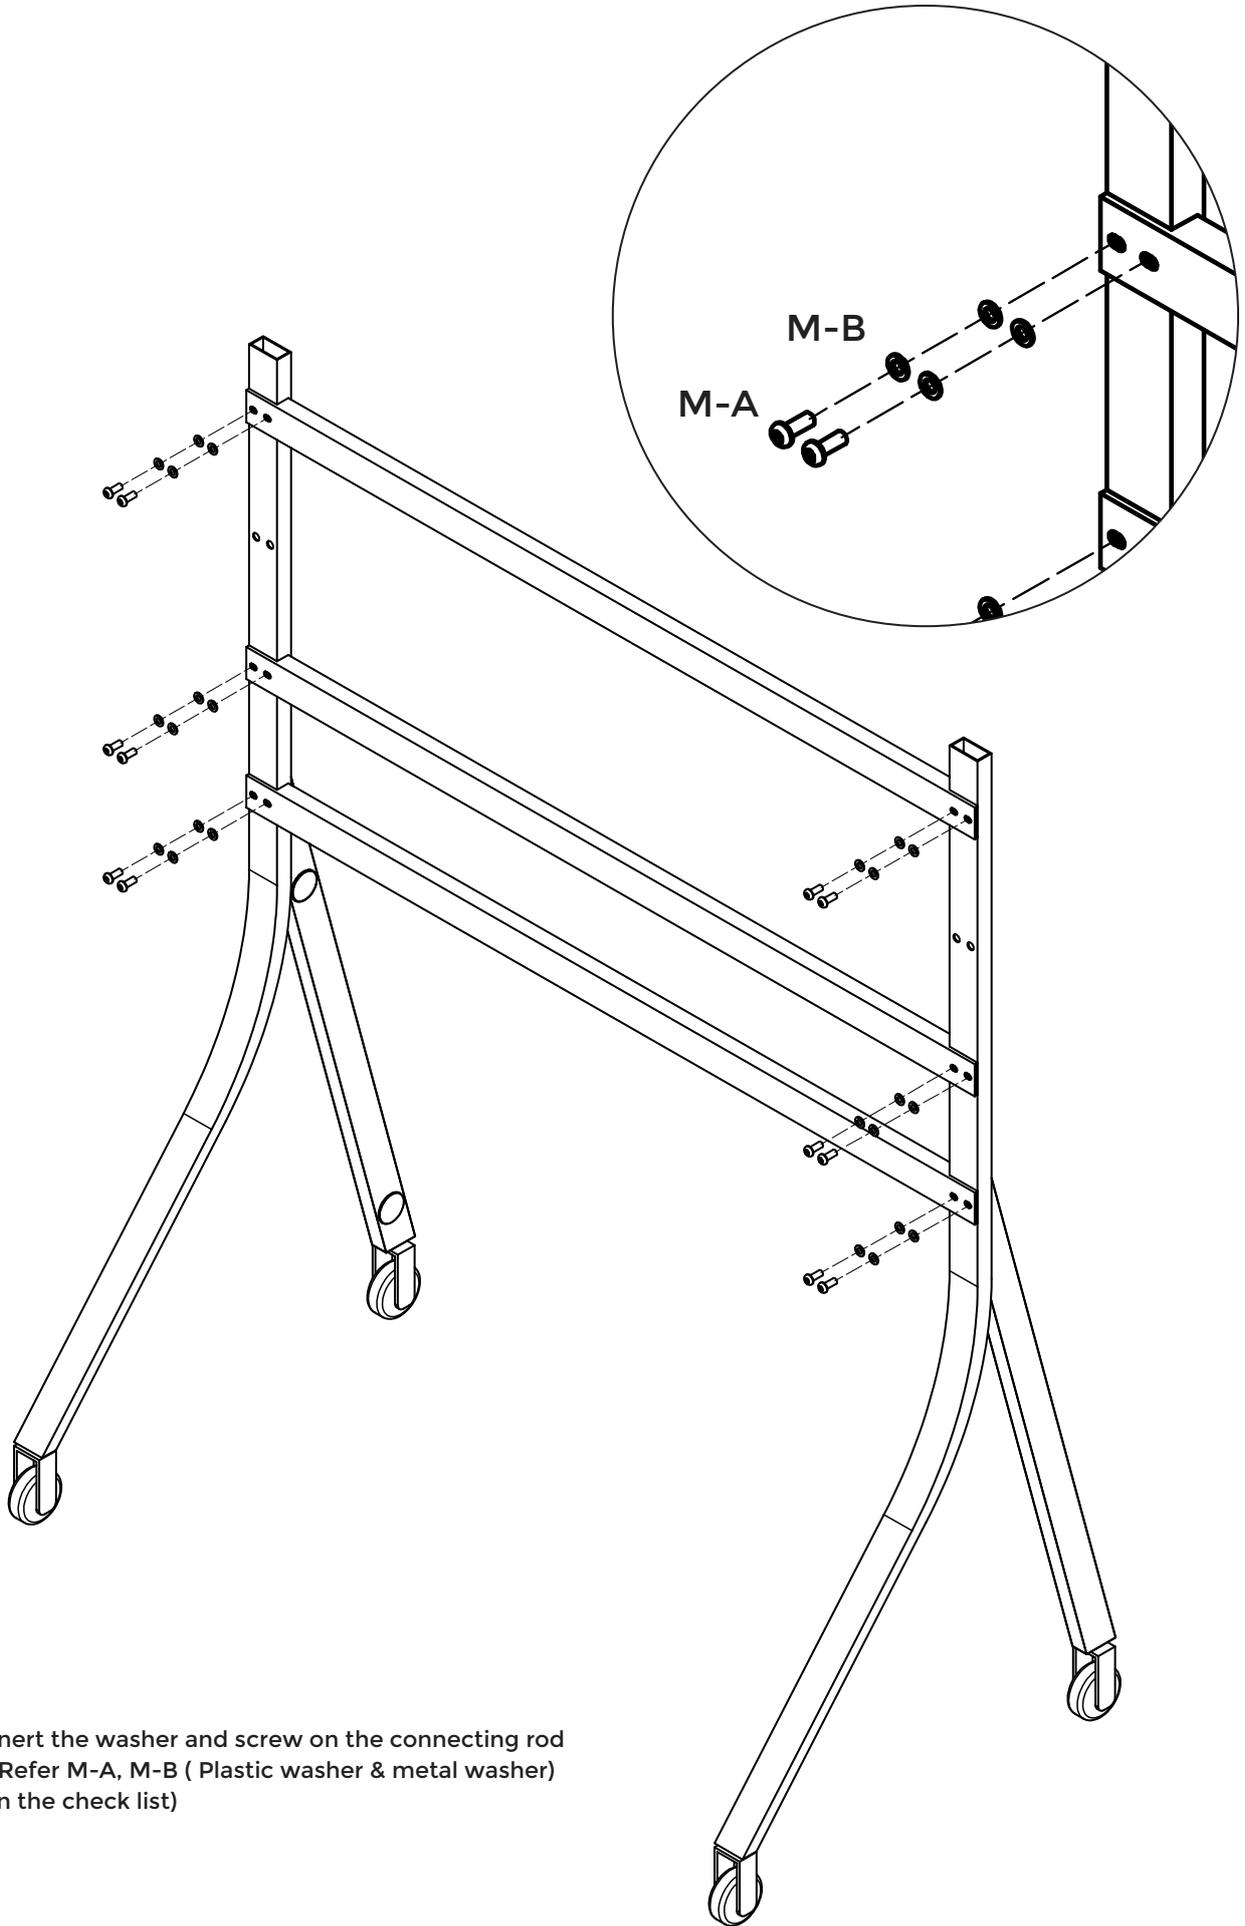


3. Inert the washer and screw on the connecting rod
(Refer M-A, M-B (Plastic washer & metal washer)
in the check list)

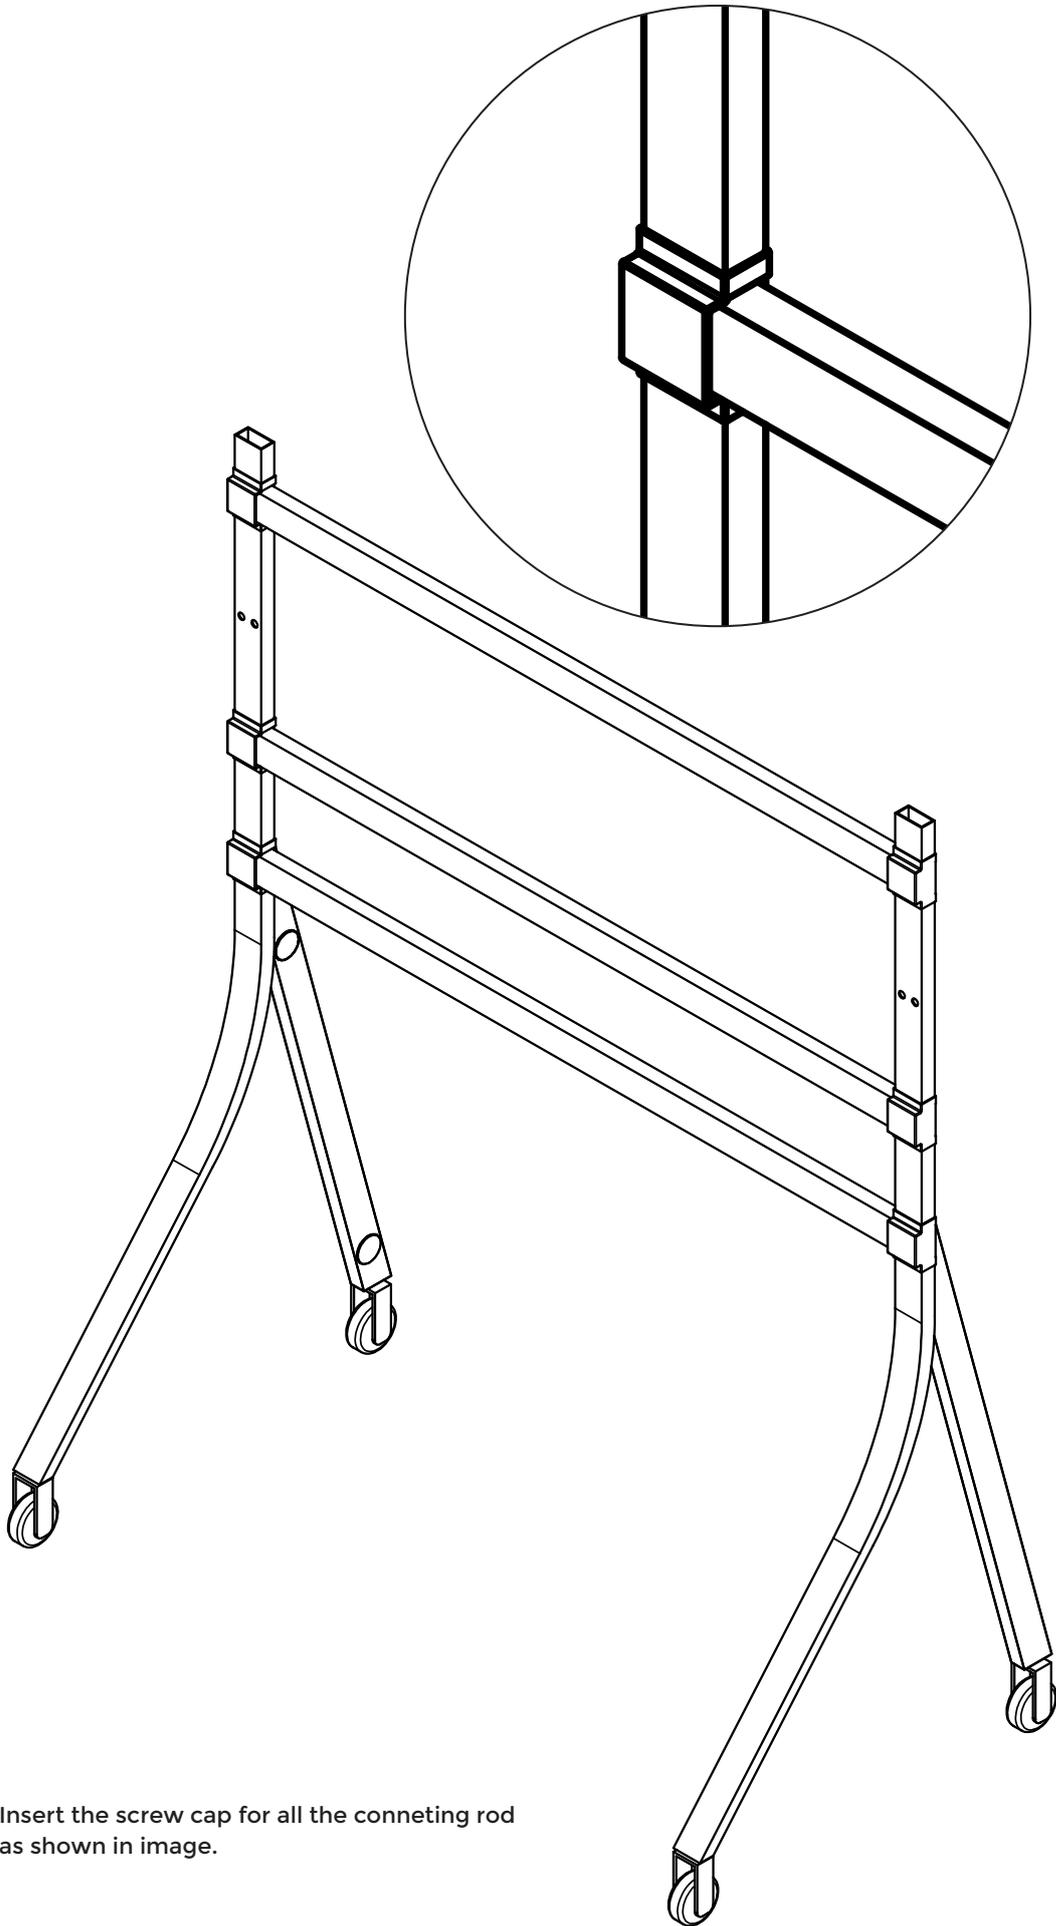


4. Insert the screw cap for all the connecting rod as shown in image.


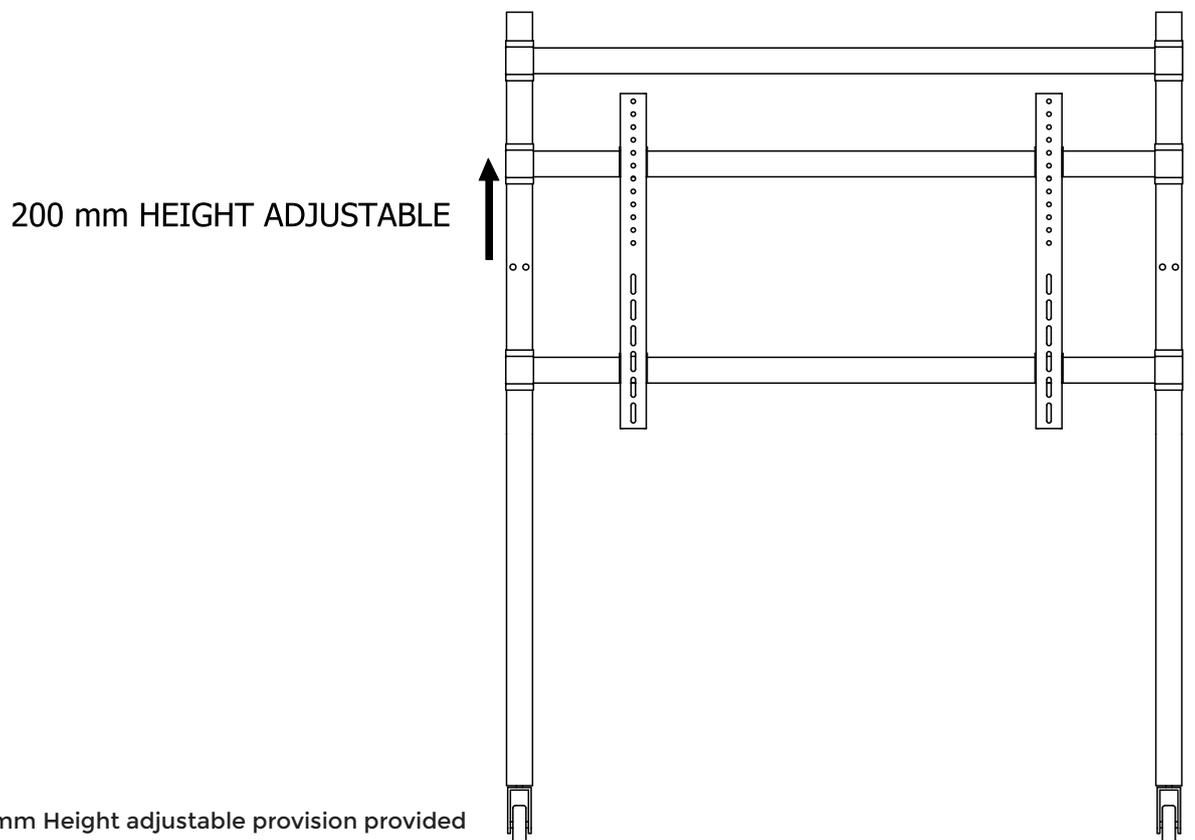
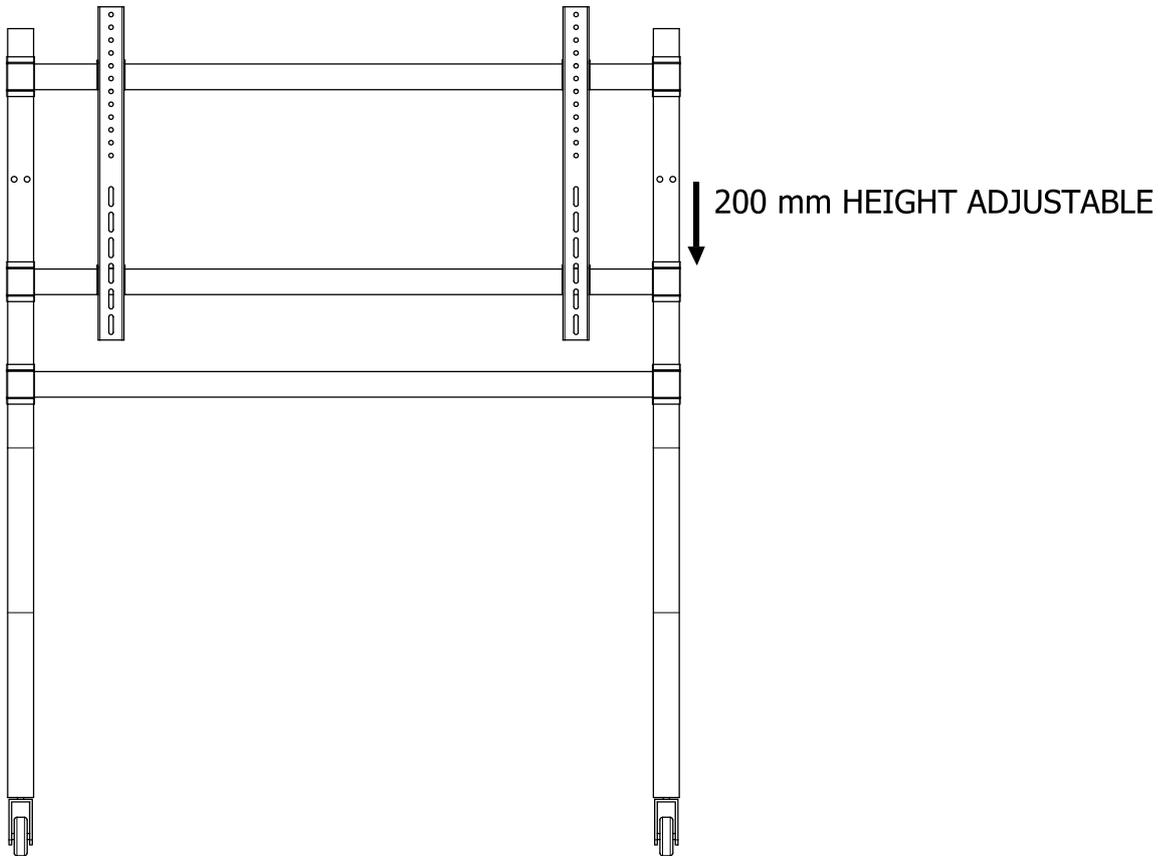


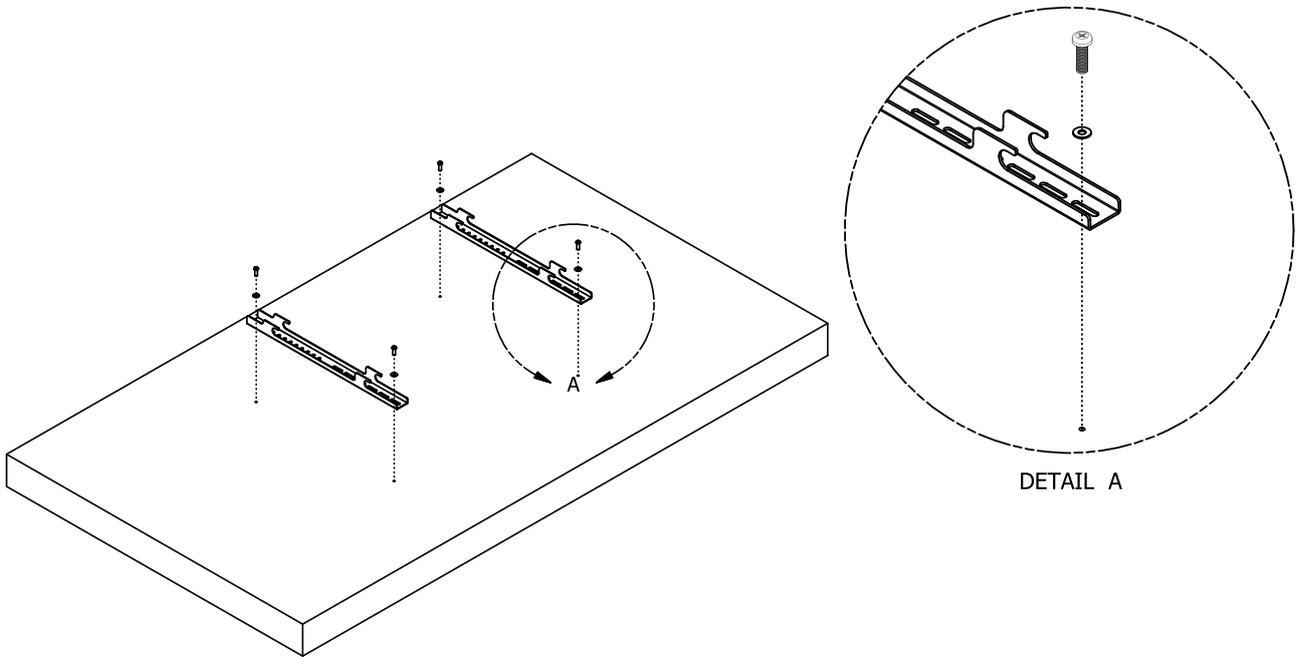

6. Place the interface bracket on the TV/ display and insert washer and screw (Refer the checklist for the suitable screw (M-C, M-E, M-G) and washer (M-D, M-F, M-H) for the display/TV)

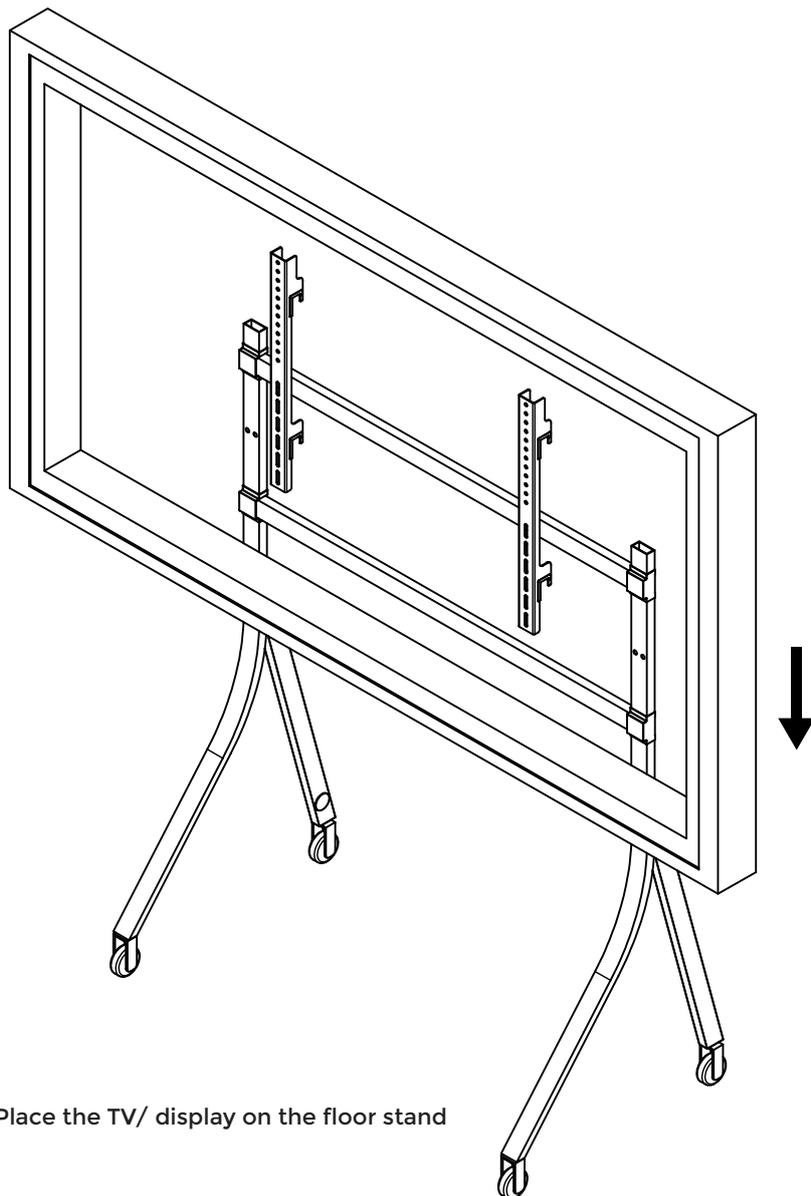

7. Place the TV/ display on the floor stand

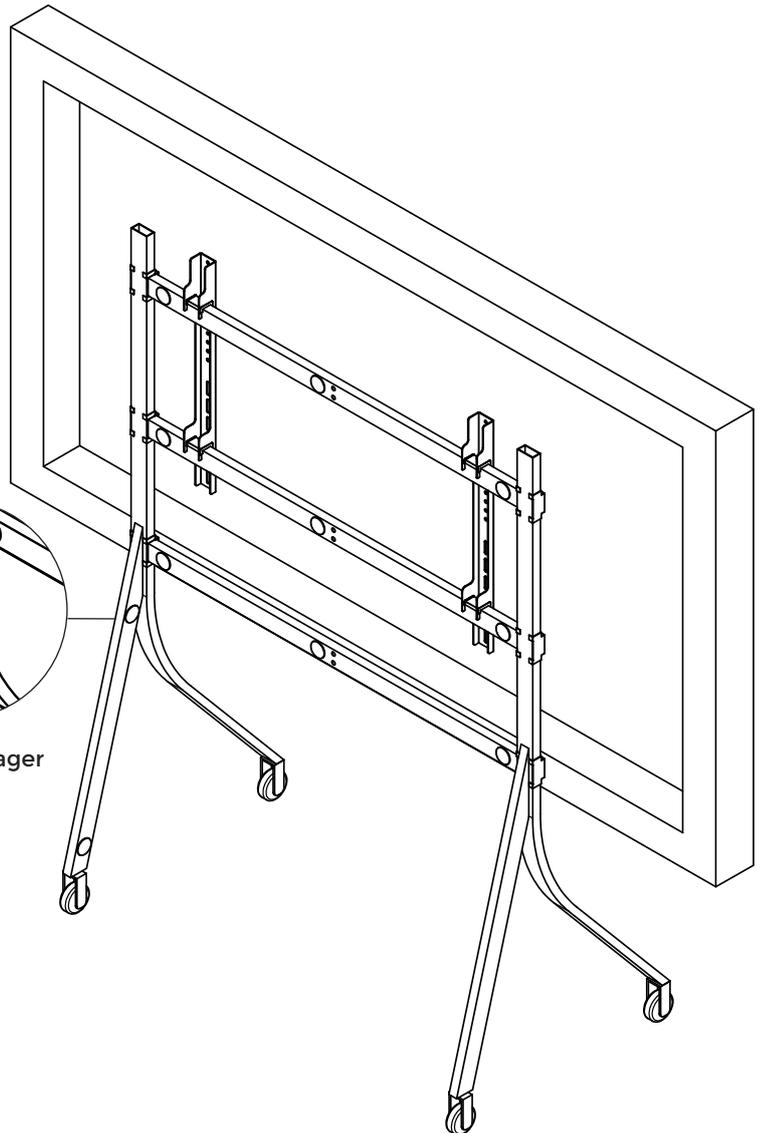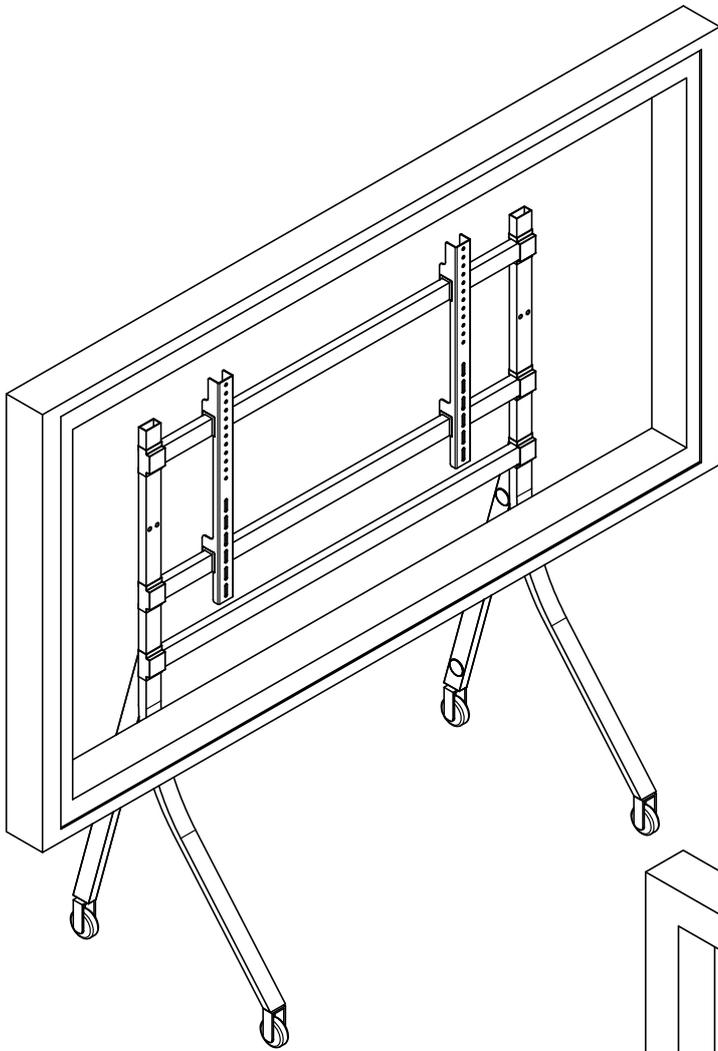

Cable Manager

Final View after installing display/TV on the floor stand