


LG-6x1BYOD-P


6 x 1 PRESENTATION SWITCHER



LG-6x1BYOD-P is a Multiformat Presentation Switcher converting AV signal from Lightning, USB-C, MINI DP, DP, HDMI Type-A and HDMI Type-D to HDMI.

Features

- Auto-detects the input signal, the last connected signal source will be switched to the output automatically.
- Supports HDMI output video resolution up to 4Kx2K@30Hz4:4:4.
- Supports Lightning, USB-C, MINI DP, DP, HDMI Type-A, and HDMI Type-D input signals to be converted to HDMI signals.
- Starts to scan from Lightning to HDMI Type-D and switch the first detected source to the output.
- Supports HDMI, DP and USB input video resolution up to 4Kx2K@30 Hz.
- The Lightning device can be powered over the Lightning cable.

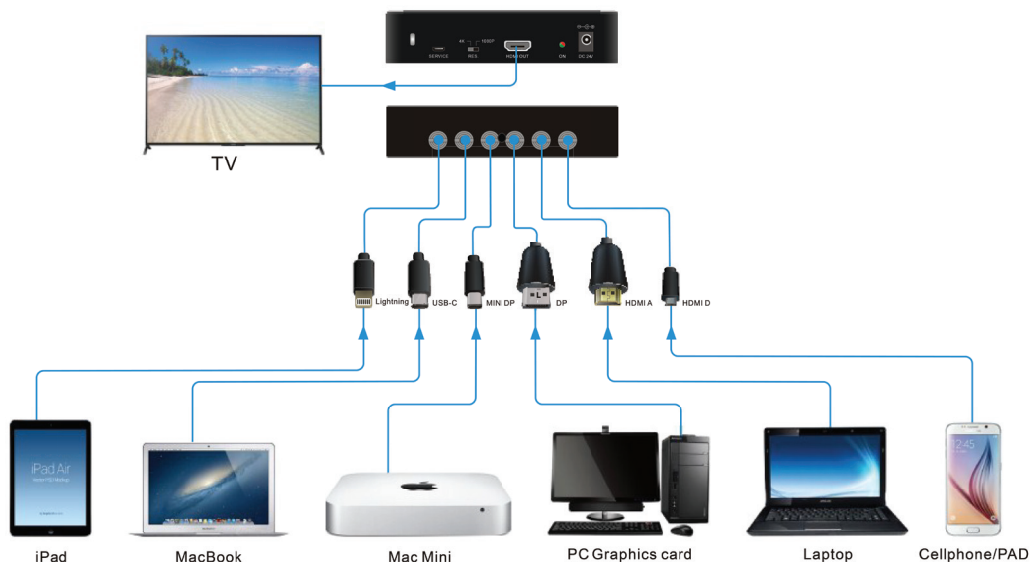

LG-6x1BYOD-P

6 x 1 PRESENTATION SWITCHER

Specification

Video Input

Input	1 x Lightning, 1 x Type C USB, 1 x Mini DP, 1 x DP, 1 x Type A HDMI, 1 x Type D HDMI
Input Resolutions	Lightning Video Resolution: Up to 1080P@60 Hz HDMI, DP, USB-C: Up to 4Kx2K@30 Hz

Video Output

Output	1 x HDMI Output Type A (19-pin female)
--------	--

Video General

Max Data Rate	10.2 Gbps
I/P & O/P Cable Length	1.3 m & 4K@5 m, 1080P@15 m
Output Resolutions	Up to 4Kx2K@30Hz 4:4:4
EDID	Smart EDID Management

General

Power Supply	Input: AC100 - 240 V 50/60 Hz, Output: DC 24 V, 1.25A
Operation Temperature	-10 °C ~ +55 °C
Storage Temperature	-25 °C ~ +70 °C
Relative Humidity	10% ~ 90% (No condensing)
Product Weight	0.77 kg
Shipping Weight	1 kg
Product Dimension (W x H x D)	135 x 30 x 135 mm
Shipping Dimension (W x H x D)	410 x 550 x 610 mm